


JILONG
Since 1993

VFL-22M

Mini Visual Fault Locator



Mini size



2.5mm Universal
connector



LED light



Features Description

- ◀ Pocket size
- ◀ Silicone dust cap
- ◀ Measuring up to 30km, high stability
- ◀ With LED lights for dark environment
- ◀ Strong light source, strong penetrating power
- ◀ 2.5mm Universal adaptor for FC/ SC/ ST

Product Features




LED light
Convenient for dark environment



Hidden button
Prevent accidental touch



Measuring up to 25km

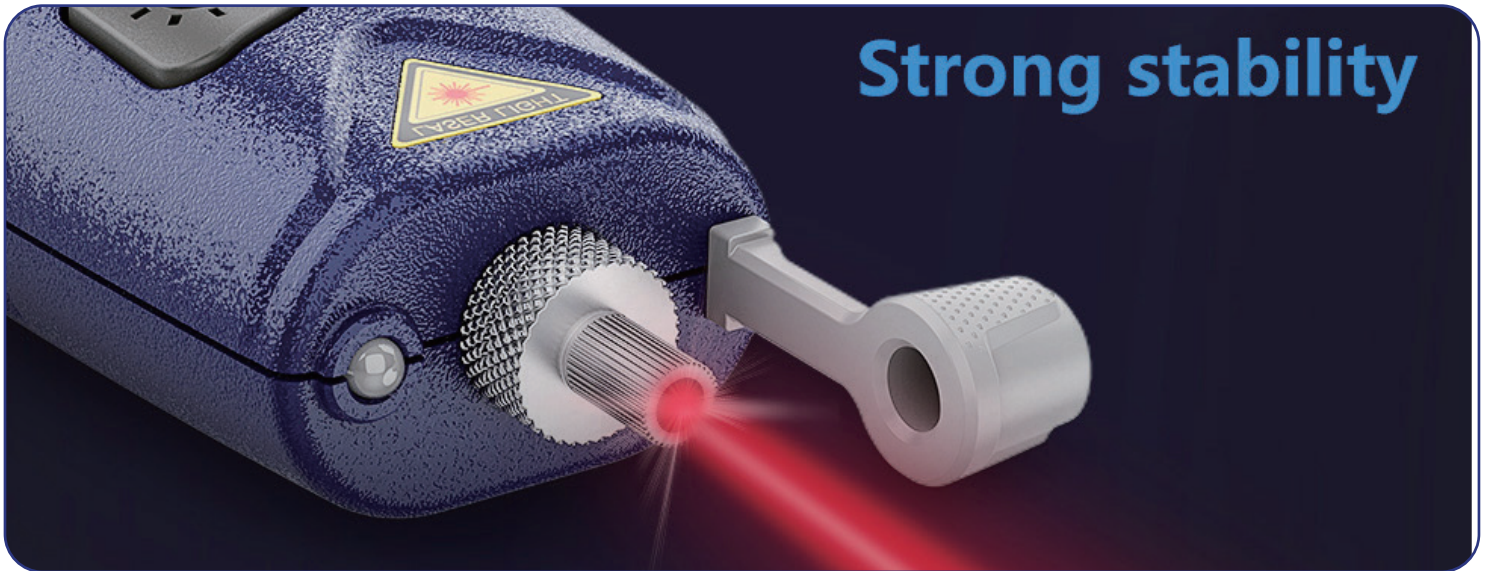

Strong stability

2.5mm Universal Connector



SC



ST



FC



Product Parameters

Model	VFL-22M-10	VFL-22M-20	VFL-22M-30
Output power	10mW	20mW	30mW
Detection distance	5-8km	12-15km	20-25km
Operating hours	12H	10H	4H
Wavelength	650nm		
Laser type	LD		
Modulation frequency	CW / 2Hz		
Operating temperature	-20 ~ +60 (°C)		
LED	Support		
Power	AAA 1.5V batteries x 2		
Dimensions	120 x 35 x 20 (mm)		
Weight	50 g (Including batteries)		

1.Measuring distance depends on factors such as optical fiber bending, connector, quality, etc.

2.The above data were obtained by Jilong Laboratory in 20°C



Product Display



Contact us

Nanjing Jilong Optical Communication Co., Ltd

Add: Room 401-402, Building 14-1, Xingzhahui Business Garden, No.19 Xinghuo Road, Pukou District Nanjing, Jiangsu, 210032, China

Tel: +86 25 58880885

Mail: info@jilongot.com

Web: www.JILONGOT.com



Focus on official website for more